


### Key performance

- Specifically designed for the latest UV applications (LE/HUV, LED UV)
- Excellent printing quality (solids and half tone reproduction)
- Very good ink release
- Avoid ink back-trapping
- Implements all benefits of the **Dynatech System:**
  - Excellent smash and edge marks resistance
  - Better vibration absorption

### MAIN APPLICATION

Sheetfed, Packaging

**Vulcan Sunrise is available in 3 ply, 1,96 mm thickness.**

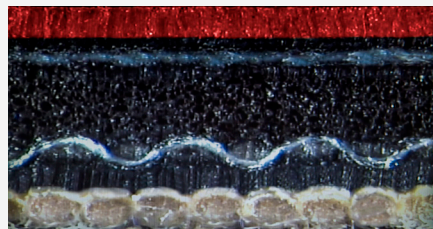

**Vulcan Sunrise**

### ✓ The product at a glance

<b>INK COMPATIBILITY</b>	UV
<b>PRINTING SURFACE COLOUR</b>	Red
<b>THICKNESS (mm)</b>	1,96
<b>AVERAGE LOAD VALUE N/cm<sup>2</sup> @ 0,23 mm Indentation</b>	230
<b>SURFACE ROUGHNESS (Ra micron)</b>	0,8
<b>ELONGATION (%)</b>	<0,9
<b>TENSILE STRENGTHS (N/mm)</b>	>60
<b>WATER &amp; SOLVENT PROTECTION</b>	No
<b>ADDITIONAL INFORMATION</b>	
<b>APPLICATIONS</b>	Dynatech System

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION  
PLEASE REFER TO YOUR SALES MANAGER  
OR EMAIL US AT: [printingsm@trelleborg.com](mailto:printingsm@trelleborg.com)**