



Super UV


Key performance

- Ideal for UV multi-colour presses
- Excellent half tone reproduction and ink transfer coverage
- Extreme quick release
- High UV chemical resistance

MAIN APPLICATION

Metal Decorating,
Packaging

Vulcan Super UV is available in 3 ply, 1,95 mm thickness.

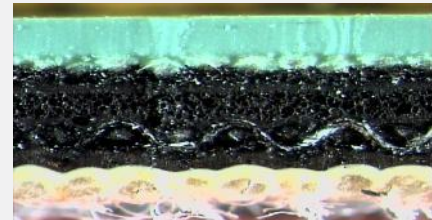

✓ The product at a glance

INK COMPATIBILITY	UV
PRINTING SURFACE COLOUR	Light Green
THICKNESS (mm)	1,95
AVERAGE LOAD VALUE N/cm2 @ 0,23 mm Indentation	400
SURFACE ROUGHNESS (Ra micron)	1,00
ELONGATION (%)	<0,9
TENSILE STRENGTHS (N/mm)	>60
WATER & SOLVENT PROTECTION	No
ADDITIONAL INFORMATION	
DESIGN	Specifically designed for UV multi-colour presses

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION
PLEASE REFER TO YOUR SALES MANAGER
OR EMAIL US AT: printing@trelleborg.com**